


MONOBLOCK PUMP

TECHNICAL SPECIFICATION

- Head : upto 85 mtr
- Capacity : Up to 263 m³/hr
- Discharge Size : 25 mm to 100 mm
- Power Rating : 1.0 HP to 20 HP Three phase
- 0.5 HP to 2.0 HP â€” Single phase
- HP: upto 40 HP
- Speed : Upto 2880/1450 RPM
- M.O.C. : C.I., CS, SS-304, SS 316, Bronze, etc.

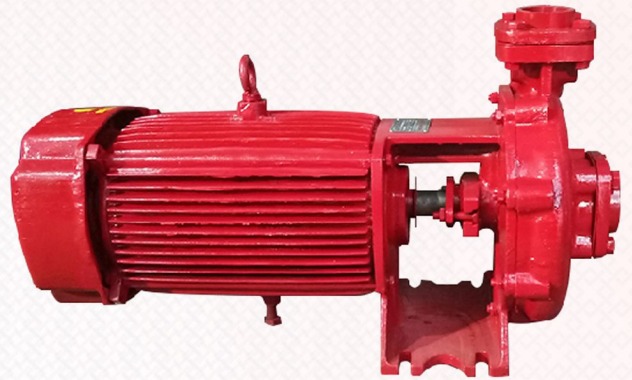

MATERIAL OF CONSTRUCTION

- Impeller : CI IS 210 FG 200 Bronze/SS410/304/316
- Delivery Casing :CI IS 210 FG 200
- Motor Body :CI IS 210 FG 200
- Shaft :Carbon Steel C40 SS410/304/316
- Shaft Sleeve:ss 410 Bronze (LTB2)
- Protection :IP 44 IP 55
- Sealing :Gland Packed Mechanical Seat

APPLICATION

- Any Industrial Clear water handling of high pressure
- Colling Towers,Refrigeration & Air Conditioning
- Boosting Pump in fire Fighting System.

